




REZABOITE P IMPLEMENTATION

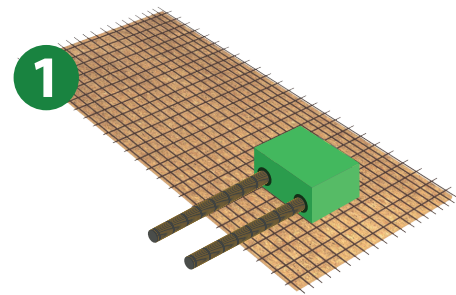

Installation of Rezaboite P directly on the welded wire mesh (hold by ligature). Incorporate the sheaths / sleeves.

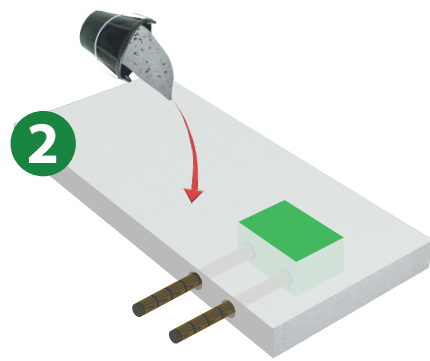


Pouring concrete around the Rezaboite P. The ducts are protected.

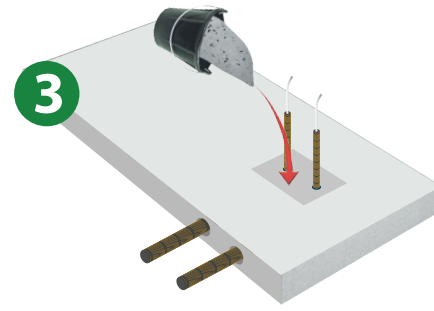


Opening of the REZABOITE P. Passing of the PE, connection to the network and filling the box.


REZABOITE G IMPLEMENTATION

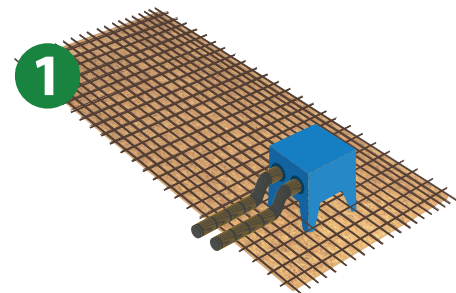

The legs of the REZABOITE G are cut to fit the thickness of the slab. The REZABOITE G is placed on the formwork base and tied to the mesh (in pre-slab: the legs are folded and spiked with a metal strip).

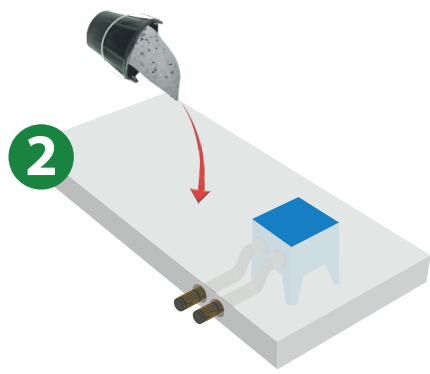

Concrete is poured around the REZABOITE G. The ducts are protected.

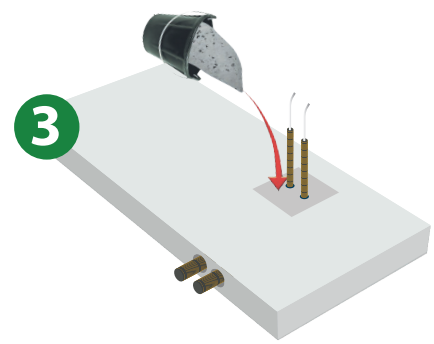

Opening of the REZABOITE G. Passing of the PE, connection to the network and filling of the box.



ENVIRONMENTALLY CONSCIOUS

100% recyclable polypropylene
Incinerates without giving off noxious
fumes and burns without residue.



REZABOITE P & G PLUMBER BOX OUT MODULE

FORMWORK SYSTEM FOR THE INCORPORATION
OF SANITARY AND HEATING DUCTS




FEATURES AND BENEFITS

- Delivered flat, storage gains
- Lightweight, easy to handle
- Full range (sanitary, heating, manifolds...)
- No adhesion to concrete, easy to remove formwork
- Pressure resistant, rot-proof
- Manage manifolds and headers with a single box
- Fast implementation (optimized assembly)
- Height adjustable without accessories (giraffe and nourrice models)



**VARIOUS
MODELS**
TO ADAPT TO ALL
CONFIGURATIONS OF THE
BUILDING/CONSTRUCTION
SITE







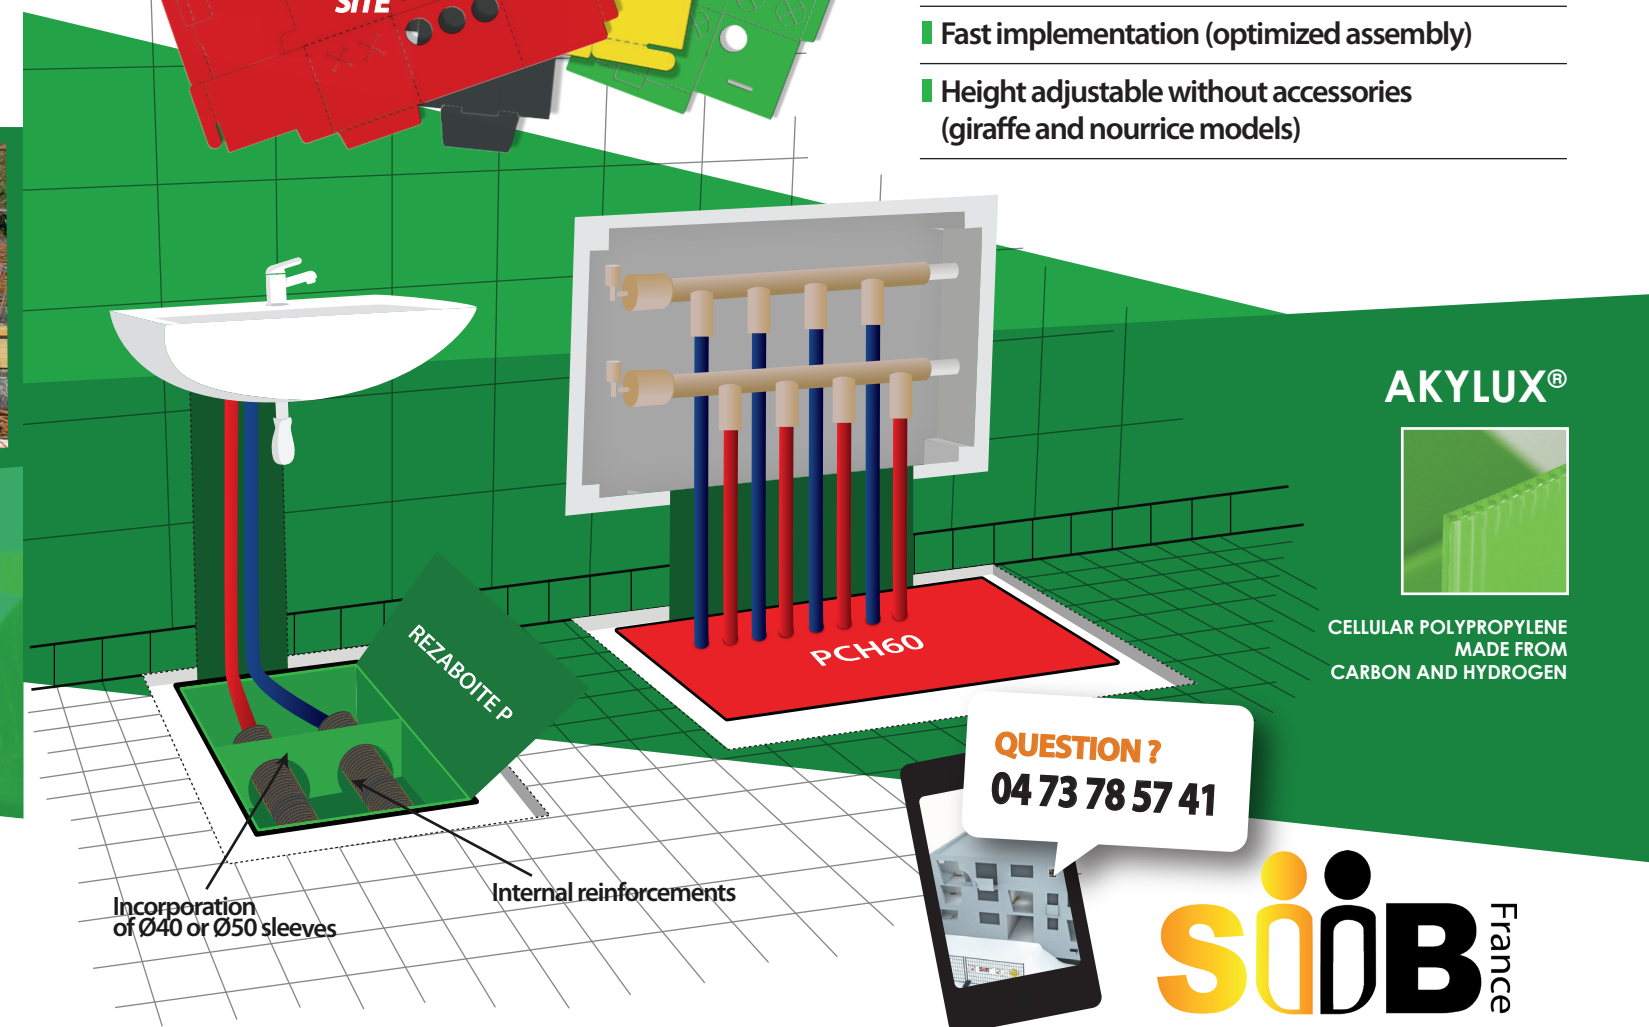


AKYLUX®




CELLULAR POLYPROPYLENE
MADE FROM
CARBON AND HYDROGEN

QUESTION ?
04 73 78 57 41

	REFERENCE	DIMENSIONS	PACKING
	P-ECO 1 PRE-DRILLED HOLE	Length : 22 cm Width : 13 cm Height : 15 cm	1800 pcs / pallet 25 pcs / parcel
	PCH25 2 + 1 PRE-DRILLED HOLES	Length : 25 cm Width : 15 cm Height : 15 cm	12 00 pcs / pallet 25 pcs / parcel
	P-VERT 4 + 4 + 2 + 2 PRE-DRILLED HOLES	Length : 25 cm Width : 20 cm Height : 17 cm	1200 pcs / pallet 25 pcs / parcel
	PCH40 4 + 4 + 12 + 6 PRE-DRILLED HOLES <small>New Modifications</small>	Length : 40 cm Width : 20 cm Height : 18 cm	500 pcs / pallet 10 pcs / parcel
	PCH60 4 + 4 + 16 + 6 PRE-DRILLED HOLES <small>New Modifications</small>	Length : 60 cm Width : 20 cm Height : 18 cm	500 pcs / pallet 10 pcs / parcel
	G800 2 + 1 PRE-DRILLED HOLES	Length : 23 cm Width : 17 cm Height : Max 25 cm	1000 pcs / pallet 25 pcs / parcel
	NOURRICE 2 + 6 + 6 PRE-DRILLED HOLES	Length : 40 cm Width : 21,5 cm Height : Max 25 cm	360 pcs / pallet 10 pcs / parcel

REZABOITE GIRAFE
SPECIFICS

The REZABOITES G800 and G Nourrice are approved by the control offices and safety organizations for many reasons such as the scale from 15 to 25 cm, the non-through box-out and the pre-drilling on the underside.

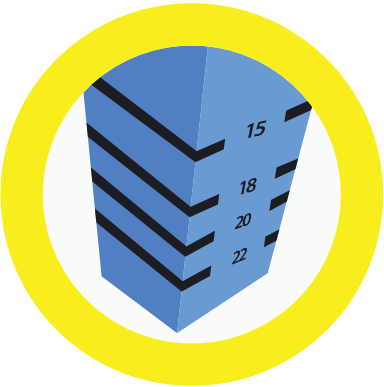

SCALE FROM 15 TO 25 CM



- Always at slab level
- No tripping hazards
- Facilitated power floating
- Easily spotted

NON-THROUGH BOX-OUT

- Securing traffic flow of workers
- Minimized filling (reducing MSD)

PRE-DRILLING ON THE UNDERSIDE

- No "bayonet" effect when passing through of the PE for thick slabs

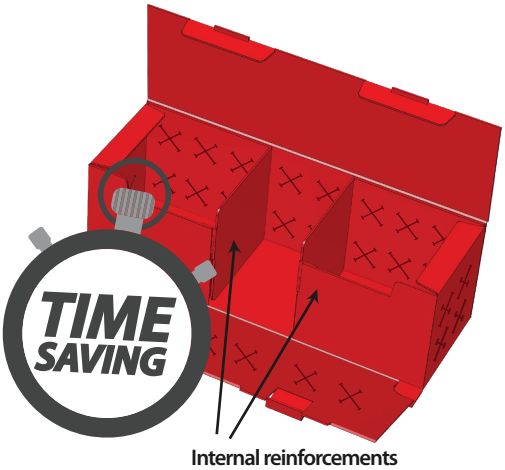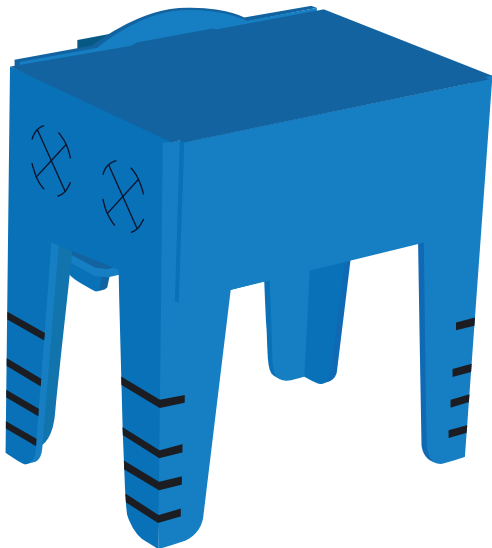

NEW MODIFICATIONS

New DESIGN, Fast Assembly
Incorporate 2 times more sleeves on 1 side

- 2 x 6 pre-drilled holes for the yellow PCH40
- 2 x 8 pre-drilled holes for the red PCH60

Improved tying of the boxes to the mesh thanks to the notches provided for this purpose